



The new SH 2 XL larger opening and much more!

The SH 2 series now has a big sister!


The machine offers more ease to crimp with a larger opening diameter without dies 82 mm (3,22") and a larger opening travel +27 mm (+ 1,06"). The crimper also very compact and lightweight for mobile application, only 80 Kg and small dimensions: 540 mm (21,25") x 716 mm (28,18") x 526 mm (20,70").

The machine is also working at lower pressure 350 bar (5000 psi) instead of 700 bar (10 000 psi), this offer us a larger option in power units from 110 to 230-volt 50/60 Hz as well 12- and 24-volt DC. The machine comes with a Quick Dies Change and a Dies Rack Storage. The warranty is 2 years.

SH 2 XL



TU 4 Ecoline
with SH 2 XL
and EM 1

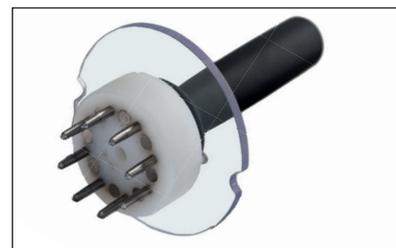

QDC 263.2



QDS 263 B



SH 2 XL

Technical Data	SH 2 XL
Crimp force (kN/Ton)	900/90
No grease: 20% less friction	✓
SAE R 12/4SP* 1 piece fitting	1¼"
SAE R 15/4SH* 2 piece fitting	1"
Industrial	1¼"
90° Elbows	1"
Max. Crimp range** (mm/inch)	63 / 2.48
Opening (mm/inch)	+27 / +1.06
Opening without dies (mm/inch)	82 / 3.22
Master dies length (mm/inch)	75 / 2.95
Type of dies	263.2
Speed (mm/sec)	
Close	2,7
Crimp	2,7
Drive	12 or 24 V DC or 1 Ph 110/220 V, 50/60 Hz.
Oil	1.50 l
L x W x H (mm)	540 x 716 x 562 without power unit
Weight	80 kg

Type of dies



∅ mm	mm
6.8	40
9	75
12	75
14	75
17	75
20	75
24	75
28	75
32	75
36	75
40	75
44	75
47	75



SH = Hollow piston press tool

* According to the fitting. ** With master dies. **

Package: Machine


+ QDS 263

+ PB 263 ∅ 14, 17, 20, 24, 28, 32, 40 mm


Description



QDS 263 B



QDC 263.2

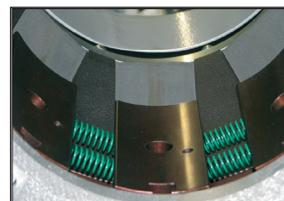

The SH 2 XL is fitted with the clean slide bearing technology.



The large opening stroke allows you to pass 90° fittings without changing the crimp dies.